


Lowering an MGB Hood:

Here's the method of lowering and folding an MGB hood as specified in the owner's manual:

1. Unclip the sun visors and move them to the side.
2. Release both windscreen frame toggle catches.
3. Release the two fasteners on the windscreen rails, the two fasteners on the cant rails and the two fasteners on the hood mounting brackets.
4. Release the four fasteners from each rear quarter panel and pull the hood slightly forward to disengage the hook from the socket on the body side panel.
5. Move the seat tilt catch forward and incline the seat backs towards the front of the car.
6. Raise the hood header rail until it is poised approximately midway over the door aperture.
7. Disengage the hood rear rail from the anchor plates on the tonneau panel.
8. Fold each quarter-light onto the back-light and continue the fold in the material forward to the header rail.
ENSURE THAT THE FOLD IS MADE IN THE HOOD MATERIAL BETWEEN THE QUARTER-LIGHT AND THE BACK-LIGHT. FAILURE TO DO THIS MAY CAUSE PERMANENT DAMAGE TO THE BACK-LIGHT MATERIAL.

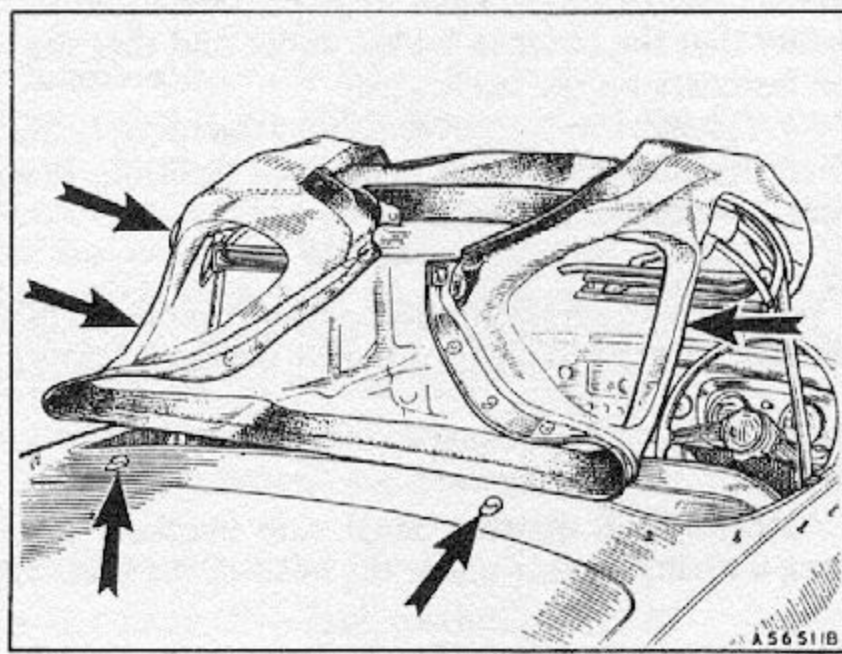

9. Push the header rail rearwards, and at the same time draw the back-light and hood material out over the luggage compartment lid ensuring that the hood material does not become trapped between the hood sticks.
10. Fully lower the hood. (Make sure that the middle transverse hood support folds backward. -- Rob) Fold the two windscreen frame toggle catches rearwards to prevent them damaging the back-light.
11. Roll the back-light and material forward over the folded hood. Position and secure the two retaining straps.
12. Replace the sun visors and return the seat back-rests to their original positions.